



P8P3 - Lincat Panther 800 Series Free-standing Hot Cupboard - Plain Top - W 1205 mm - 1.5 kW

Helping to cater in demanding environments such as cafeterias, canteens and restaurants, the Panther 800 Series Hot Cupboard is perfect for plating and garnishing and as a pass to front of house staff, while it also provides extra workspace or can be used as a mobile workstation.

- ✓ Helping to cater in demanding environments such as cafeterias, canteens and restaurants
- ✓ Fan assisted hot cupboard provides even heat distribution, fast heat up and recovery times, and lower energy usage. Four shelf positions allow adjustment to meet individual needs.
- ✓ Fully 1/1 GN compatible hot cupboard for operational efficiency. Units available to take 3 x 1/1 GN containers up to 150mm deep.
- ✓ Accurate digital electronic control of the hot cupboard temperature, adjustable between 20 and 99 °C, ensures compliance with food hygiene regulations
- ✓ Double skinned construction provides efficient heat retention and a cool to touch exterior - safe and energy efficient. Removable doors and shelves allow access to the fully stainless steel interior for easy cleaning
- ✓ Supplied with two heavy duty multi-section chrome plated rod shelves capable of taking the heaviest loads

Specifications

| Summary | | Power and Performance | |
|-----------------------------|-----------------------------------|-----------------------------|------------|
| Brand | Lincat | Total Power kW | 1.50 |
| Range | Panther | Temperature Range °C | 20-99 |
| Series | 800 Series | IP Rating | IP24 |
| Power Type | Electric | Temperature Control | Electronic |
| Unit Type | Free-standing | | |
| Available in UK Only | No | | |
| UK Warranty | 2 Years Parts and Labour Warranty | | |
| Export Warranty | Contact your local dealer | | |
| GTIN | 5056105103554 | | |

| Key Specifications | | Capacity | |
|-----------------------------------|--------|-----------------------|-----|
| Number of Shelves included | 2 | Plate Capacity | 316 |
| Number of Shelf Positions | 4 | | |
| Heated Base | Yes | | |
| Heated Gantry | No | | |
| Static or Mobile | Mobile | | |

| Weights and Dimensions | | Supply Connections | |
|----------------------------------|-------|---------------------------------------|-------|
| Unit Height (External) mm | 900 | Requires Installation | No |
| Unit Width (External) mm | 1205 | Requires Electrical Supply | Yes |
| Unit Depth (External) mm | 850 | UK 3 Pin Plug | Yes |
| Height (Internal) mm | 432 | Requires Hardwiring | No |
| Width (Internal) mm | 1,020 | Electrical Supply Rating Watts | 1,500 |
| Depth (Internal) mm | 512 | Single Phase Amps | 6.5 |
| Shelf Dimensions Width mm | 980 | Single Phase Voltage | 230 |
| Shelf Dimensions Depth mm | 512 | | |
| Net Weight Kg | 113 | | |

Shipping

| | |
|-------------------------|-----|
| Packed Weight Kg | 133 |
| Packed Height cm | 110 |
| Packed Width cm | 123 |
| Packed Depth cm | 90 |

Available Options

Overshelf or Gantry

| | |
|--------------|-------------------------------|
| PG3A | PG3A - Ambient Gantry |
| PG3H | PG3H - Heated Gantry |
| PS3A1 | PS3A1 - 1 Ambient Overshelf |
| PS3A2 | PS3A2 - 2 Ambient Overshelves |
| PS3A3 | PS3A3 - 3 Ambient Overshelves |
| PS3H1 | PS3H1 - 1 Heated Overshelf |
| PS3H2 | PS3H2 - 2 Heated Overshelves |
| PS3H3 | PS3H3 - 3 Heated Overshelves |

Door Locks

| | |
|-------------|----------------------|
| PDL3 | PDL3 - Lockable Door |
|-------------|----------------------|

Corner Guards

| | |
|------------|-----------------------------------|
| PCG | PCG - Corner Guards [Set of Four] |
|------------|-----------------------------------|

Trayslides

| | |
|-------------|-------------------|
| PTS3 | PTS3 - Tray Slide |
|-------------|-------------------|



Legs/Castors

| | |
|------------|-----------------------------|
| PLK | PLK - Legs [non chargeable] |
|------------|-----------------------------|

Available Accessories

| | |
|--------------|---|
| PLK/S | PLK/S - LEG KIT [FOR CONVERSION IN THE FIELD] |
| PPB8 | PPB8 - ADDITIONAL PUSHBAR |

Technical Picture

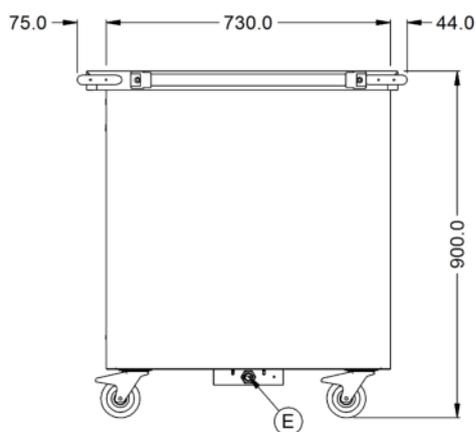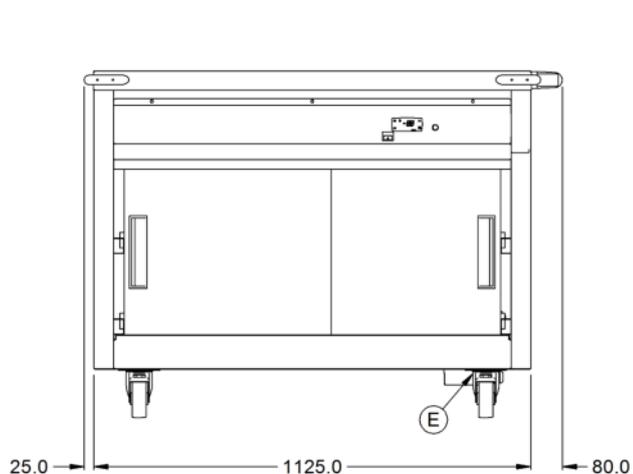

Lincat Limited

Whisby Road,
Lincoln, LN6 3QZ,
United Kingdom

Company No: 2175448

A member company of



Customer Care

Tel: +44 1522 875500
Email: care@lincat.co.uk

Export Customers

Tel: +44 1522 875536
Email: export@lincat.co.uk

Opening Hours

Monday – Friday:
8.30am – 5pm